
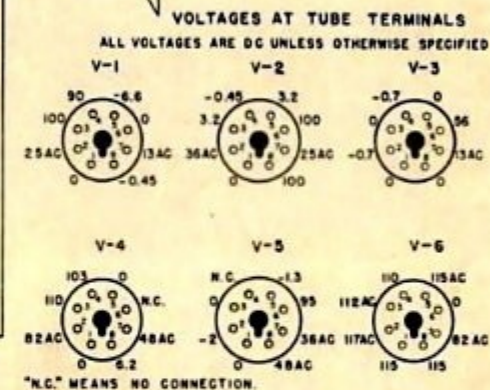



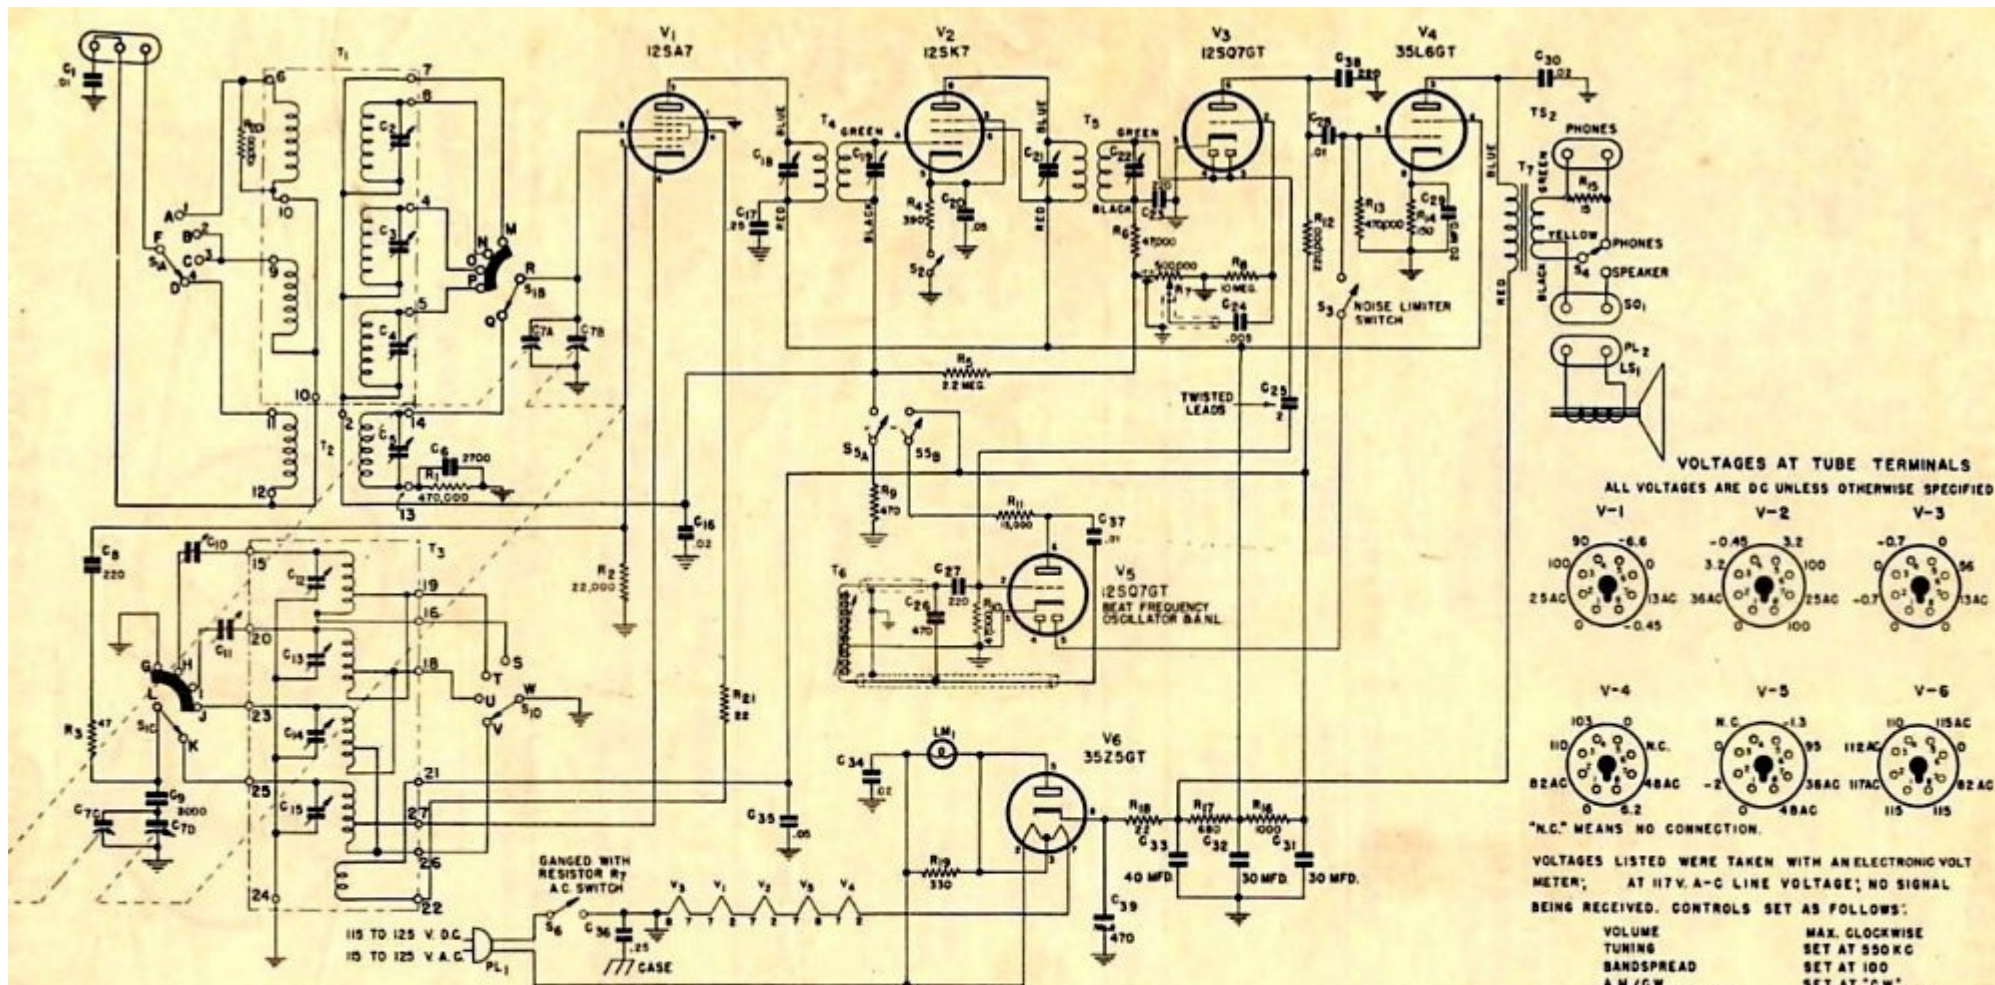


VOLTAGES LISTED WERE TAKEN WITH AN ELECTRONIC VOLT METER, AT 117V. A-C LINE VOLTAGE; NO SIGNAL BEING RECEIVED. CONTROLS SET AS FOLLOWS:


VOLUME	MAX. CLOCKWISE
TUNING	SET AT 550 KC
BANDSPREAD	SET AT 100
A.M./G.W.	SET AT "C.W."
RECEIVE/STANDBY	SET AT "RECEIVE"
NOISE LIMITER	SET AT "OFF"
BAND SELECTOR	SET AT "1"
SPEAKER/PHONES	SET AT "SPEAKER"

NOTE: RESISTANCE VALUES ARE IN OHMS; MICA CAPACITOR VALUES ARE IN MMF.; PAPER CAPACITOR VALUES ARE IN DECIMAL EQUIVALENTS OF MFD; ELECTROLYTIC CAPACITOR VALUES ARE IN MFD.

BANDSWITCH S1



ANT. TRANSFORMER T2

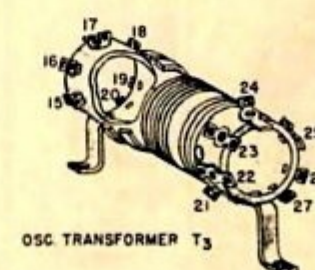

NOTE: DIMENSIONS & PROPORTIONS SHOWN IN PICTORIAL VIEWS HAVE BEEN EXAGGERATED FOR CLARITY OF TERMINAL LUG LOCATION.

ハリクラフターズ
S-38 回路図